



BRIGHTON

Light Your Future With Brightness






BRIGHTON

Light Your Future With Brightness

Conceal Panel Lights

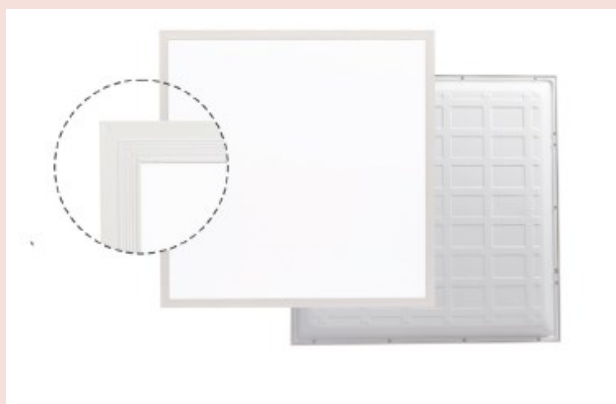

Specifications

- Aluminum Diecasting Body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- CRI > 70
- Driver—SunAnshul / Philips / Fulham
- Input Voltage—110 VAC—270 VAC
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%

Model	Watt	Outer Size in mm	Cut Out Size in mm
BOP-1015	4 W	82 X 82	70 X 70
BOP-1025	6W	110 X 110	95 X 95
BOP-1035	9W	120 X 120	100 X 100
BOP-1045	12 W	150 X 150	138 X 138
BOP-1055 *	15 W	175 X 175	150 X 150
BOP-1065	18W	190 X 190	175 X 175
BOP-1075 *	22 W	220X 220	200X 200
BOP-1085	30 W	300 X 300 (1 X 1)	285 X 285
BOP-1095	40/50 W	595 X 595 (2 X 2)	575 X 575


* 3 in 1 Option Available



BRIGHTON

Light Your Future With Brightness

Surface Panel Lights

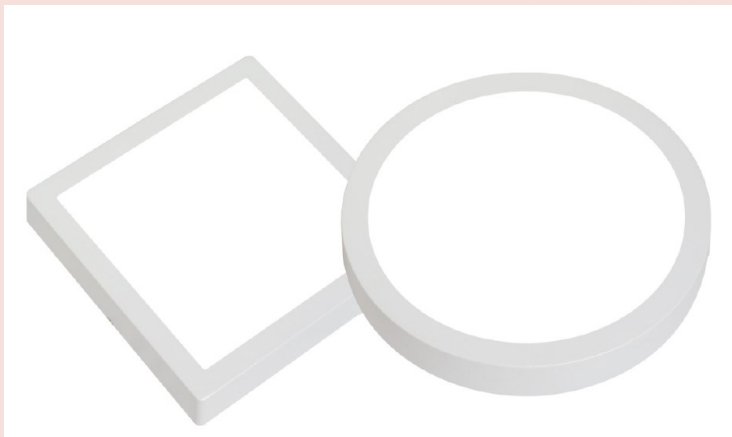

Specifications

- Aluminum Diecasting Body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- CRI > 70
- Driver—Brighton/ Philips / Fulham
- Input Voltage—110 VAC—270 VAC
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%

Model	Watt	Outer Size in mm	Height in mm
BOPS-1105	4 W	80 x 80	35
BOPS-1115	9W	120 x 120	35
BOPS-1125	12W	143 x 143	35
BOPS-1135	15W	167 x 167	35
BOPS-1145	22W	205 x 205	35
BOPS-1155	30W	300 x 300	50



BRIGHTON

Light Your Future With Brightness

PANEL Lights

BACKLIGHT REAMLESS

POLY CARBONATE BODY



Specifications

- PC / Aluminum Casting body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- CRI > 70
- Driver—Brighton/ Philips / Fulham
- Input Voltage—110 VAC—270 VAC
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%
- Warranty: 2 years Ex Factory/ Outlet

Model	Watt	TYPE	Cutout Size in mm
BOBR-1535	3W	ROUND & SQUARE	63x63
BOBR-1545	6W	ROUND & SQUARE	102x102
BOBR-1555	12W	ROUND & SQUARE	152 x 152
BOBR-1565	18W	ROUND & SQUARE	203 x 203



BRIGHTON

Light Your Future With Brightness

**Down Light
Rimless**



Specifications

- Aluminum Diecasting Body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- CRI > 70
- Driver—Brighton / Philips / Fulham •
- Input Voltage—110 VAC—270 VAC •
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%

Model	Watt	TYPE	Outer Size in mm	Cutout Size in mm	Height in mm
BOD-1685	8/12 W	ROUND	119	112	53
	8/12 W	SQUARE	110 x 110	100 x 100	53
BOD-1695	18 W	ROUND	154	125	58
	18 W	SQUARE	145 x 145	120 x 120	58
BOD-1705	24 W	ROUND	175	150	58
	24 W	SQUARE	170 x 170	140 x 140	58



BRIGHTON

Light Your Future With Brightness

COB SPOT Lights

MOVABLE



Specifications

- Aluminum Diecasting Body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- CRI > 70
- Driver—Brighton / Philips / Fulham
- Input Voltage—110 VAC—270 VAC
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%

Model	Watt	TYPE	Outer Size in mm	Cutout Size in mm	Height in mm
BOC-1225	4 W	ROUND / SQUARE	68 x 68	58 x 58	35
BOC-1235	7 W	ROUND / SQUARE	88 x 88	70 x 70	40
BOC-1245	12/15 W	ROUND / SQUARE	105 x 105	85 x 85	55
BOC-1255	15/20/25 W	ROUND	120	105	75
BOC-1265	30/36 W	ROUND	145	135	90
BOC-1275	40/50 W	ROUND	160	145	100



BRIGHTON

Light Your Future With Brightness

COB SPOT Lights

FIX TYPE

DELTA MODEL



BOCS—1326/1336/1346

DELTA DEEP



BOCS—1355

BOCS—1365

Specifications

- Aluminum Diecasting Body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- LED Beam Angle: 24/36/60 degree
- Reflector: Shinland / Darcoo
- CRI > 70
- Driver—Brighton / Philips / Fulham
- Input Voltage—110 VAC—270 VAC
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%
- Warranty: 2 years Ex Factory/ Outlet

Model	Watt	TYPE	Outer Size in mm	Cutout Size in mm	Height in mm
BOCS1326	7 W	ROUND	70	60	65
BOCS-1336	12 W	ROUND	83	76	75
BOCS-1346	18 W	ROUND	95	85	85
BOCS-1355	15 W	ROUND	90	80	100
BOCS-1365	15 W	ROUND	83	76	100



BRIGHTON

Light Your Future With Brightness

COB SPOT Lights

FIX TYPE

BUTTON COB



BOCB-1375/1385



BOCB-1385



BOCB—1395 (Surface Button)



CYLINDER



BOCB—1405/1415/1425

Specifications

- Aluminum Diecasting Body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- LED Beam Angle: 24/36/60 degree
- Reflector: Shinland / Darcoo
- CRI > 70
- Driver—Brighton/ Philips / Fulham
- Input Voltage—110 VAC—270 VAC
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%
- Warranty: 2 years Ex Factory/ Outlet

Model	Watt	TYPE	Outer Size in	Cutout in	Height in
BOCB-137	1 W	ROUND	35	28	20
BOCB--138	3 W	ROUND & SQUARE	40 x 40	34	25
BOCB--139	3 W	ROUND & SQUARE	65 x 65	65	30
BOCB--140	10/15 W	CYLINDER	75		150
BOCB--141	20/25 W	CYLINDER	100		150
BOCB--142	30/36 W	CYLINDER	100		200



COB SPOT Lights

DIMMABLE / 3-in-1 / Tunable

3-in-1 / Dimmable



LOTUS -BOCD - 2017/20112



ROSEGOLD-BOCD - 2037/20312

Dimmable



GALAXY-BOCD - 2027/20212



BLACK SATIN BOCD - 2027/20212



IGNITE -BOCD - 2047/20412 CCT Tunable

Specifications

- Aluminum Diecasting Body
- Color Temp : 3000/ 4000/ 6500 K
- LED Make : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- LED Beam Angle: 24/36/60 degree
- Reflector: Shinland / Darcoo
- CRI > 70
- Driver—Brighton/ Philips / Lumistar •
- Input Voltage—110 VAC—270 VAC
- Surge Protections 4KVA
- PF > 0.95
- THD < 15%
- Warranty: 2 years Ex Factory/ Outlet
- Separate Remote for CCT Tunable

Model	Watt	TYPE	Cutout Size in mm	3-in-1 Option	Dimmable Driver
BOCD-2017	7 W	LOTUS	50	YES	YES
BOCD-20112	12 W	LOTUS	75	YES	YES
BOCD-2037	7 W	ROSEGOLD	65	YES	YES
BOCD-20312	12 W	ROSEGOLD	75	YES	YES
BOCD-2027	7 W	GALAXY	30	NO	YES
BOCD-20212	12 W	GALAXY	50	NO	YES
BOCD-2037BS	7 W	BLACK SATIN	65	NO	YES
BOCD-20312BS	12 W	BLACK SATIN	75	NO	YES
BOCD-2047	7 W	IGNITE	50	NO	CCT TUNABLE
BOCD-20412	12 W	IGNITE	75	NO	CCT TUNABLE



BRIGHTON

Light Your Future With Brightness

Track Lights



BOT-2135



BOT-2145/2155



BOSL-2165/2175/218

Suspended Linear Lights

Model	Watt	TYPE	SIZE in mm	CCT degree K
BOT-2135	10/15 W	TRACK LIGHT	210x100x60	3000/4000/6500
BOT-2145	20/25/30 W	TRACK LIGHT	210x125x70	3000/4000/6500
BOT-2155	40/50 W	TRACK LIGHT	210x130x80	3000/4000/6500
BOSL-2165	18 W	SUSPENDED LINEAR	70(H)x600(L)x50(W)	3000/4000/6500
BOSL-2175	36 W	SUSPENDED LINEAR	70(H)x1200(L)x50(W)	3000/4000/6500
BOSL-2185	72 W	SUSPENDED LINEAR	70(H)x2400(L)x50(W)	3000/4000/6500



BRIGHTON

Light Your Future With Brightness

TUBE LIGHTS

Specifications

- Color : CW/NW/WW
- LED : BridgeLux / Epistar
- LED Efficacy > 130 Lm
- CRI > 70
- Driver—Brighton
- I/P - 110 VAC-270 VAC
- Surge Protections 2.5 KVA
- PF > 0.95
- THD < 15%
- Warranty: 1 years
Ex Factory/ Outlet



Aluminium Model

ANODISED / POWDER COATED

Model No	Watt	Length
BOT-T5-SQ-AL-20	20	4 feet
BOT-T5-SQ-AL-10	10	2 feet
BOT-T5-SQ-AL-5	5	1 Feet
BOT-T5-X2-AL-20	20	4 feet
BOT-T5-X2-AL-10	10	2 feet
BOT-T5-X2-AL-5	5	1 Feet
BOT-T5-MSH-AL-20	20	4 feet
BOT-T5-MSH-AL-10	10	2 feet
BOT-T5-MSH-AL-5	5	1 Feet
BOT-T5-RET-AL-20	20	4 feet
BOT-T5-RET-AL-10	10	2 feet
BOT-T5-RET-AL-5	5	1 Feet
BOT-T8-AL-SQ-36	36	4 feet
BOT-T8-AL-SQ-18	18	2 feet

PC (Plastic) Model

Model No	Watt	Length
BOT-T5-SQ-PC-20	20	4 Feet
BOT-T5-SQ-PC-10	10	2 feet
BOT-T5-SQ-PC-5	5	1 Feet
BOT-T5-X2-PC-20	20	4 feet
BOT-T5-X2-PC-10	10	2 feet
BOT-T5-X2-PC-5	5	1 Feet
BOT-T5-MSH-PC-20	20	4 feet
BOT-T5-MSH-PC-10	10	2 feet
BOT-T5-MSH-PC-5	5	1 Feet
BOT-T5-RET-PC-20	20	4 feet
BOT-T5-RET-PC-10	10	2 feet
BOT-T5-RET-PC-5	5	1 Feet



BRIGHTON

Light Your Future With Brightness

BULBS



Specifications

BULB ECO

- LUMENS 80/90 PER WATT
- I/P VOLTAGE = 160v-300v AC
- DRIVER ON BOARD (DOB)
- PF 0.9
- ALUMINIUM BODY
- Warranty 6 Months

BULB REGULAR

- LUMENS 120-130 PER WATT
- I/P VOLTAGE = 160v-300v AC
- HPF DRIVER
- PF 0.95
- 4 KVA Surge Protection
- ALUMINIUM BODY
- Warranty 12 Months

HAMMER BULB / T BULB

- LUMENS 120-130 PER WATT
- I/P VOLTAGE = 160v-300v AC
- HPF DRIVER
- PF 0.95
- 4 KVA Surge Protection
- ALUMINIUM BODY
- Warranty 24 Months

RECHARGIABLE BULB

- LUMENS 120-130 PER WATT
- I/P VOLTAGE = 160v-440v AC
- PF 0.95
- 4 KVA Surge Protection
- ALUMINIUM BODY
- 3-4 HRS BACKUP
- Warranty 12 Months

Model	Watt	TYPE
BOB-BLB-DOB-3	3	BULB ECO
BOB-BLB-DOB-5	5	BULB ECO
BOB-BLB-DOB-7	7	BULB ECO
BOB-BLB-DOB-9	9	BULB ECO
BOB-BLB-DOB-12	12	BULB ECO
BOB-BLB-DOB-15	15	BULB ECO
BOB-BLB-DOB-18	18	BULB ECO
BOB-BLB-HPF-3	3	BULB REGULAR
BOB-BLB-HPF-5	5	BULB REGULAR
BOB-BLB-HPF-7	7	BULB REGULAR
BOB-BLB-HPF-9	9	BULB REGULAR
BOB-BLB-HPF-12	12	BULB REGULAR
BOB-BLB-HPF-15	15	BULB REGULAR
BOB-BLB-HPF-18	18	BULB REGULAR
BOB-HMR-30	30	HAMMER BULB
BOB-HMR-40	40	HAMMER BULB
BOB-HMR-50	50	HAMMER BULB
BOB-ACDC-9	9	RECHARGIABLE BULB
BOB-ACDC-12	12	RECHARGIABLE BULB
BOB-TBLB-HPF-10	10	T-BULB



BRIGHTON

Light Your Future With Brightness

PROFILE Lights

MODEL NO.	DESCRIPTION	DIMENSIONS [W x H x Top W] IN mm
BOPF-501	17 MM SURFACE	17.6 X 6.85
BOPF-502	17 MM CONSEAL	17.5 X 6.85 X 24.5
BOPF-510	17 MM DEEP SURFACE	17.6 X 14.47
BOPF-511	17 MM DEEP CONSEAL	17.6 X 14.47 X 24.5
BOPF-512	17 MM CORNER	15.8 X 15.8
BOPF-512	17 MM CORNER	17.0 X 12.0
BOPF-503	7 MM SURFACE	7.5 X 6
BOPF-504	7 MM CONSEAL	7 X 6 X 12
BOPF-508	25 MM SURFACE	23.29 X 9.7
BOPF-509	25 MM CONSEAL	23.29 X 9.7 X 27.7
BOPF-513	35 MM SURFACE	35 X 35
BOPF-514	35 MM CONSEAL	35 X 35 X 50.41
BOPF-515	55 MM SURFACE	55 X 32
BOPF-516	55 MM CONSEAL	55 X 32 X 69.6
BOPF-517	50 MM DOUBLE DEKKER	50 X 70
BOPF-518	ROUND HANING	20.7 X 20.5
BOPF-520	WARDROBE PROFILE	15.1 X 29.2





BRIGHTON

Light Your Future With Brightness

STRIP Lights

MODEL	NO. LED/ MTR	PCB SIZE in mm	LED SPECS	Watt/ Meter	COLOR
BOSL-401-120	120	8	2835/26 Lm/ 12V	16	WH-WW-NW/Blue/Green/IceBlue/Red/ Amber/Pink
BOSL-401-120	120	5	2835/26 Lm/ 12V	16	WH-WW-NW/Blue
BOSL-401-240	240	10	2835/26 Lm/ 12V	32	WH-WW-NW/Blue/Green/IceBlue/Red/ Amber
BOSL-402-60	60	8	2835/26 Lm/ 12V/ Premium	8	WH-WW-NW
BOSL-402-120	120	8	2835/26 Lm/ 12V/ Premium	16	WH-WW-NW
BOSL-402-120	120	5	2835/26 Lm/ 12V/ Premium	16	WH-WW-NW
BOSL-402-180	180	10	2835/26 Lm/ 12V/ Premium	18	WH-WW-NW
BOSL-402-240	240	10	2835/26 Lm/ 12V/ Premium	16	WH-WW-NW
BOSL-402-240	240	10	2835/26 Lm/ 12V/ Copper	16	WH-WW-NW
BOSL-404-240	240	10	2835/26 Lm/ 24V/ Premium	16	WH-WW-NW
BOSL-404-60- RGB	60	10	5050/ 12V / RGB	8	RGB
BOSL-IP67-60	60	10	5050/26 Lm/ 12V	8	WH-WW-NW
BOSL-IP67-120	120	10	5050/26 Lm/ 12V	16	WH-WW-NW
BOSL-IP67-NEO N-LED	60	17	5050/26 Lm/ 230VAC	8	WH-WW/Green/Blue





BRIGHTON
Light Your Future With Brightness

STRIP SMPS

MODEL NO.	AMPERE	DESCRIPTION {L*W*H}
BOSS-IP67--301-1A	1A	50*35*25
BOSS-IP67--301-2A	2A	65*35*25
BOSS-IP67--301-3A	3A	70*35*25
BOSS-IP67--301-5A	5A	70*50*25
BOSS-IP67--301-7A	7A	80*50*25
BOSS-IP67--301-10A	10A	90*50*25
BOSS-IP67--301-12A	12A	110*62*38
BOSS-IP67--301-15A	15A	120*62*38
BOSS-SLIM--302-2A	2A	102*30*20
BOSS-SLIM--302-3A	3A	102*30*20
BOSS-SLIM--302-5A	5A	170*53*18
BOSS-SLIM--302-8.5A	8.5A	195*53*18
BOSS-SLIM--302-10A	10A	226*53*18
BOSS-SLIM--302-12.5A	12.5A	250*53*22
BOSS-SLIM--302-15A	15A	250*53*22
BOSS-SLIM--302-16.6A	16.6A	308*53*22
BOSS-SLIM--302-20A	20A	308*53*22
BOSS-SLIM--302-25A	25A	308*53*22
BOSS-SLIM--302-33.3A	33.3A	358*53*22
BOSS-REG--302-5A	5A	160*40*32
BOSS-REG--302-10A	10A	185*45*35
BOSS-REG--302-15A	15A	200*55*37
BOSS-GRY--304-2A	2A	135*35*23
BOSS-GRY--304-3A	3A	135*35*23
BOSS-GRY--304-5A	5A	170*35*23
BOSS-GRY--304-10A	10A	145*27*48
BOSS-STIK--305 2A	2A	188*18*18
BOSS-STIK--305 5A	5A	283*18*18
BOSS-STIK--305 10A	10A	327*18*18
BOSS-24V--306-5A	5 AMP	185*45*35
BOSS-24V--306-10A	10 AMP	220*67*40

SPECIFICATIONS

- I/P VOLTAGE = 160v-300v AC
- PF 0.95
- 4 KVA Surge Protection
- ALUMINIUM BODY
- Warranty 24 Months



BRIGHTON

Light Your Future With Brightness

LED PRODUCT CATALOGUE

Marketed By

ELECTRO TRANS

Office # 7, Devkaran Mansion No.7, 24, Vithaldas
Road, Lohar Chawl, Mumbai 400 002

Contact: + 91- 83568 58558 / + 91- 93242 46546

Customer Care : +91 - 22 - 4002 3643

Email: brightonlights@yahoo.com